Station Circular 57 August, 1924

Oregon Agricultural College

Experiment Station

Supplemental Irrigation for the Willamette Valley

By

W. L. Powers

Chief, Department of Soils

CORVALLIS, OREGON

The regular bulletins of the Station are sent free to the residents of Oregon who request them.

Supplemental Irrigation for the Willamette Valley

W. L. Powers

Frequent recurrence of periods of drouth during the late summer has developed considerable interest in the possibility of supplemental irrigation in the Willamette Valley. In 1907 the Office of Irrigation Investigations, United States Department of Agriculture, began some irrigation tests at Corvallis and other points, to determine the value of irrigation water as a supplement to the limited summer rainfall, as a means of increasing production and profit, particularly with the more intensive agriculture that was beginning to take the place of grain growing. Increases in yields of representative field crops ranged from 27 percent to 186 percent, indicating that supplementary irrigation wisely used with most late season crops would prove profitable on the naturally drained, free working soils of the Valley where accessible to water.

In 1910 the experiments were extended to include soil moisture investigations; water variation trials, or duty-of-water experiments to determine how much irrigation would be needed; also to develop practices for securing highest efficiency and the greatest net profit from the pumped water. Water requirement studies were added and also observations of the effects of irrigation on soils and crops.

Soils best suited to supplemental irrigation in the Willamette Valley are those that are free working, without being too heavy or sticky on the one hand or too coarse and sieve-like on the other hand. The sandy loam soils occurring along the Willamette and other stream bottoms, or soils belonging to the Newberg and Chehalis series, and the lighter types of soils on the Valley floor, such as Willamette loam or silt loam, are suitable for irrigation. Soil surveys of two-thirds of this Valley indicate that perhaps half a million acres, or about one-sixth of the improved land in the Valley will give good response to supplemental irrigation.

Crops found to give best response to supplemental irrigation here are the truck crops, the crops grown for intensive dairying, such as late summer pasture and late cuttings of legume crops, or row crops that make their maximum growth late in the season, such as roots and corn. Potatoes and beans are cash crops which give large returns from irrigation and are likely to pay for proper irrigation.

Advantages of supplemental irrigation. The chief advantages of supplemental irrigation for free working, naturally drained Willamette Valley soils, are as follows: (1) Irrigation controls soil moisture, overcomes drouth; (2) provides green pasture and green feed late in the summer; (3) saves the clover stand and makes a cutting the first season; (4) makes double cropping possible—late crops after early crops; (5) aids the beneficial bacterial and chemical activities in soil; (6) aids control of crop pests and diseases; (7) increases efficiency of soil moisture during the best growing weather; (8) is an aid to deep or early plowing

and intensive cropping; (9) softens clods and dissolves plant foods; (10) proper irrigation pays in increased yields, net profits, and productive values.

For supplemental irrigation to be highly profitable in the Willamette Valley it must be used on the naturally drained, free working soils and applied to crops that respond to late season irrigation and that are of good value. The greatest profit is secured where water is efficiently used. The Experiment Station has sought to determine the minimum amount of water which, together with the best time and manner of use and cultivation, would yield crops of highest values and greatest returns upon the land and water employed. If the increase from irrigation is sufficient to pay for water when pumped a moderate lift and applied to staple field crops it would certainly pay to use gravity irrigation on the more intensive crops. The Station experiments have been conducted with water pumped from a creek and discharged at a level 20 feet above the creek for use upon Willamette silty clay loam with staple field crops.

Water supply. The water available for irrigation in this Valley is of good quality and a suitable supply will be found in the "underflow," which occurs in the gravel substratum under the river-bottom soils, or along the bottoms of other large streams. Water can also be pumped for irrigation from perennial streams entering the Valley from the foothills. Some irrigable lands are situated so that these waters can be applied by gravity. In the old Valley filling, or Valley floor above the first bottom, it is not probable that wells of moderate depth will develop sufficient water to give a continuous supply for centrifugal pumps in volumes sufficient for field use.

COST OF A SMALL PUMPING PLANT

The cost of installing a small pumping plant includes the following items of expense:

(a) First cost—engine, pump, flume, or pipes, and in some cases a well and shelter for machinery.

(b) Operating expense—labor, fuel, and lubricating oil.

(c) Maintenance charges—interest on the first cost, depreciation, and repairs.

(d) Total annual cost—"(b) operating expense" and "(c) maintenance charges."

The cost of pumped water increases with the amount of lift and is frequently expressed in cost per acre foot per foot of lift. The pumping plant employed by the Experiment Station is not operated to half its capacity, yet maximum charges have been used in calculation. The total annual cost runs 58 cents per acre foot per foot of lift. This is a total cost of a dollar per acre inch delivered at a 20 foot level. With a well designed pumping plant and a moderate lift, operating nearly to capacity, the cost should run from 15 to 40 cents per acre foot. The maximum figure of a dollar per acre inch, however, has been used in calculating the profits from irrigation on the Experiment Station.

The largest single item of expense is usually the motor or engine. The majority of farms are now equipped with some power machin-

ery, which may be used to drive the irrigation pump. Where water can be pumped from a stream a moderate sized centrifugal pump, piping, and valves should cost from $150 to $300. The first cost of a pumping plant is frequently $25 per acre.

Wells. A dug well is not suitable for a water supply for continuous pumping with a centrifugal pump. In the river-bottom lands an open pit may be dug to the water-level and then a driven, cased well put down, perhaps 30 feet below the water plane. The last 12 or 15 feet of this casing should be thoroughly perforated, or a strainer dropped in and the casing jacked up to expose the strainer to the water-bearing sand and

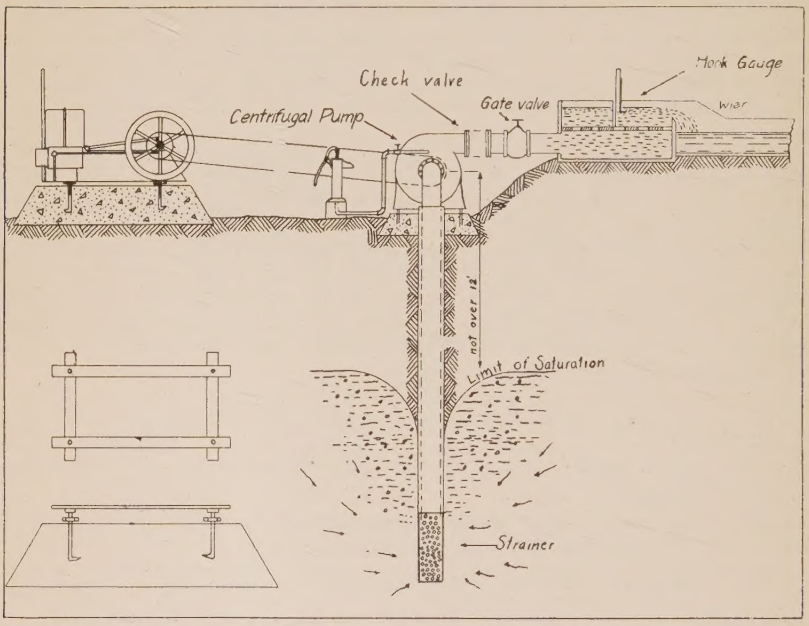

Fig. 1. Gasoline engine and pumping plant design for well. Templet at lower left hand corner for spacing bolts in foundation.

gravel. The pump should set within 10 feet of the water-table, which is lowered a little in the vicinity of the well casing during pumping. Where necessary, large radius bends and suction and discharge pipes should be used. These pipes should be about one-third larger in diameter than the pump itself in order to lessen friction. It is necessary to provide a priming device for removing the air from a centrifugal pump. A check valve and a straight-way ground gate valve should be provided in the discharge pipe immediately above the pump.

Every foot of lift represents additional cash outlay. The water should not be pumped with an imposing splash or fall above the necessary level for commanding the field to be irrigated. The water can be conveyed to the high part of the land by means of pipes directly connected with the discharge side of the pump. Black tin or water-tight concrete can be used for distribution pipe. If built on a slight grade,

wood flumes can be used to carry the water by gravity from the point of discharge.

Pumps. The simple, horizontal, centrifugal pump will be suitable for most purposes in this Valley. Any good standard make will supply the water needed. The number of a centrifugal pump refers to the inside diameter of inlet and outlet openings. A number four, or four-inch centrifugal pump, will discharge about a cubic foot per second or 450 gallons of water per minute. One cubic foot of water each second will amount to one inch deep over an acre in one hour, and is called an acre inch.

Motive power. An electric motor with direct connection with the pump is a most satisfactory source of power as it avoids loss in bolting and requires minimum attention. Any difference in cost between the use of distillate and electricity as a source of energy is more than made up by the saving in attendance where the electric power can be employed. In fact, the saving in the labor may often amount to more than the total fuel bill with the electric plant.

Amount of water and power required. The average depth of water applied per season to field crops during the past fifteen years at the Experiment Station has been 6 inches per acre. This is the net amount applied to Willamette silty clay loam and it ranges from 4 to 5 inches for row crops to 8 to 12 inches for meadow crops. More water will be required for sandy soils. The amount will vary somewhat with the yield of dry matter and methods of irrigation practiced. The quantity of water required for alfalfa or clover is not likely to be less than 5 or 6 acre inches (equivalent to 5 or 6 inches rainfall) for each ton of increase secured by irrigation. In the Station experiments each inch of water has made about 33 bushels more potatoes or 5 bushels more white beans.

The minimum depth that it is feasible to apply to row crops in one irrigation is usually 2 to 3 inches. Meadow crops will usually require 4 to 6 inches at each application. The pump capacity should be sufficient to cover the area served every 3 to 4 weeks. An irrigating stream of less than 225 gallons per minute, or a half a cubic foot per second, is not economical from a labor standpoint. It may be advisable to provide a small reservoir with a small pumping plant, especially for truck crops, so that some water will be available at any hour without pumping; or to enable more continuous operation by storing at night to provide a larger irrigation stream by day.

Calculation of power required. One horse-power will lift a cubic foot of water 8.8 feet per second and is called a water hourse-power. To the apparent vertical lift must be added the friction head for the length of pipe used for proposed discharge; also the friction due to bends in suction and discharge pipes. The friction value for pipes can be obtained from tables. Suppose the total head is found to be 26.4 feet, and 1 cubic foot per second is to be elevated continuously; by dividing 26.4 feet by the factor 8.8 it is found that 3 water horse-power would be required to operate this plant. Therefore, making the ordinary allowance for efficiency of machinery at 50 percent, 6 hourse-power should be provided.

Priming and operation. A pitcher pump connected by small gas pipe to the top of the centrifugal pump is a suitable means for removing the air in priming. This pipe must be provided with an air-tight valve to close it up tightly after priming. All pipe connections should be flanged and gasketed so that they fit air-tight. Centrifugal pumps are designed for different lifts and for every given lift there is an economic speed. When ordering a pump to go with an engine already on hand or vice versa, give diameter of pulley and revolutions per minute, so that the pump will run up to the rated economic speed. Flexible couplings should be provided between the pump and motor in a direct-connected unit. Where water is secured from an open stream a screen should be

Fig. 2. Furrow irrigation of potatoes.

provided in the intake channel. The pump should be set on a concrete base, carefully leveled by supporting nuts placed on the anchor bolts. When true to level, rich cement should be run in around these bolts and the pump bolted down by means of other nuts run on from above the pump base.

Economical use of pumped water necessary. Careful use of pumped water is necessary if the greatest profit is to be realized. Excessive use of water may injure the quality of soil and crops to the point of unprofitable production, even in arid climates. The water, therefore, should be carefully measured and skillfully applied. The land should be leveled to a uniform slope and laterals should be as near water-tight as practicable. Frequently it is desirable to use underground concrete or wood pipe for laterals. To distribute water from hydrants along this pipe, portable canvas hose or slip-joint, black, tin pipe may be used.

Small furrows or corrugations for distributing water on the field will save water as compared to flooding where the stream is small. A soil that is of medium texture is needed. The furrows may be 3 to 4 feet apart, 220 to 240 feet long, being shorter on sandy soil. As soon as possible after irrigation, or when the soil is dry enough to crumble, cultivation of row crops should be given in order to restore tilth, kill seedling weeds, and check evaporation.

FOURTEEN YEARS' RESULTS ON SUPPLEMENTAL IRRIGATION IN THE WILLAMETTE VALLEY

Table I shows results of fourteen years of irrigation on Willamette silty clay loam at the Experiment Station. This does not include data for the present growing season or for 1923, although experiments are being continued. The main experiment includes a rotation of grain, clover, potatoes, and corn. One-tenth acre of each crop is dry farmed, one-tenth acre receives a light irrigation, a third tenth receives a medium amount of water, and a fourth portion a large amount of irrigation. Where winter grain is used no water is supplied to that crop. The amount of water that has given the maximum net profit or best amount of irrigation for all crops is averaged in Table I and amounts to 6 inches depth per acre. Nearly a two-ton increase in the yield of hay crops has been secured. This increase in growth comes in the late cuttings. It frequently happens that irrigation saves a stand of clover or provides green feed or pasture late in the season. The average increase from irrigation of potatoes is 83 bushels per acre, or 21 bushels per acre inch, or per dollar total annual irrigation cost. Beans have received an average depth of 3 inches supplied in a single irrigation, and have given an increase of practically 5 bushels per acre.

TABLE I. SUMMARY OF FOURTEEN YEARS' EXPERIMENTS SHOWING BEST AMOUNT OF IRRIGATION AND VALUE OF SILTY CLAY LOAM
Oregon Agricultural College Experiment Station—Department of Soils

	Years in trial	Depth of irrigation	Yield per acre		Increase from Irrigation		Net dollars per acre
			Irrigation Bu. or T.	Dry Bu. or T.	Per acre Bu. or T.	Per inch Bu. or T.	
		in.					
Potatoes	14	4.00	210 bu.	133.00	83.00	21.00	$35.10
Clover	11	7.65	528 T.	3.47	1.81	.24	10.05
Alfalfa	11	10.00	5.05 T.	2.81	2.14	.21	10.90
Corn	9	5.31	9.15 T.	6.18	2.97	.56	8.79
Beans	10	3.00	17.28 bu.	12.38	4.90	1.63	11.55
Carrots	1	3.00	23.42 T.	13.02	10.40	3.46	36.00
Beets	8	5.40	18.66 T.	11.84	6.82	1.26	20.18
Kale	3	4.00	15.67 T.	13.74	1.93	.48	4.18
Grass*	7	9.33	3.97 T.	3.66	1.17	.10	2.07
Average	6 inches						$12.09

The net increase from irrigation in dollars per acre has been obtained by charging a dollar per acre inch, plus a small charge for harvesting the amount of the increase, for crops valued at a moderate, average price; namely, 50c per bushel for potatoes, $3.00 per bushel for beans, and $10.00 per ton for hay. Three cents per bushel and 25c per ton was charged for harvesting the increase. The average net increase in crop value for all crops from the average application of 6 inches has been slightly more than $12.00 per acre.

*Pastured some.

VALUE OF ROTATION AND MANURING IN CONNECTION WITH IRRIGATION

In the early years of this experiment it became very evident that rotation which permitted plowing down legume sod, and turning under manure in each crop rotation, was of great value in increasing efficiency of the water provided. An experiment was therefore arranged to measure the value of crop rotation and manure for increasing the return per unit of water employed. Four plots each of grain, Alsike clover, and white beans were grown each year, and the crops rotated in the order named. One plot of each crop was dry farmed, the second was dry farmed and manured, the third was irrigated, and the fourth was irrigated and manured. Two additional plots, one irrigated and one dry farmed, were provided adjacent to these rotations, and were cropped to beans continuously. One of these was dry farmed and the other irrigated.

The results secured from the nine years of this experiment covering 3 rotations are given in Table II.

TABLE II. VALUE OF ROTATION, IRRIGATION, MANURED—NINE-YEAR AVERAGE

Treatment	Average yearly yield		Average net profit			Water requirement (lbs. per lb. dry matter)
	Acre	Acre inch	Acre	Gain from rotation of manure	Acre inch	
		in.			*in.*	
Beans:						
Continuous	9.24	.....	11.55	.....	.....	2,909
Rotated	10.13	.....	20.37	8.82	.....	2,249
Rotated and manured	12.91	.....	21.26	9.71	.....	1,900
Irrigated continuous	9.85	3.82	15.37	.....	5.12	2,622
Irrigated and rotated	15.74	6.10	29.46	14.09	9.82	1,794
Irrigated, rotated and manured	18.29	7.14	38.39	23.02	12.80	1,425

At the beginning of this experiment the average yield of all plots was about 12 bushels of beans per acre. The plots cropped continuously were on slightly better soil than those of the rotation. The land is "half-white land" or Amity silty clay loam. At the end of this experiment we found the continuously cropped plots produced about 6 bushels per acre, and the plots which received irrigation rotation and manure yielded about 20 bushels per acre. As a nine-year average the yields were practically doubled, due to irrigation, rotation, and manure once each crop rotation. As a result of these treatments, the yield per acre inch was more than doubled and the average net profit was greatly increased by rotation and by the use of manure in each rotation. The profit per acre inch of water employed also showed a marked increase from these treatments. The last column in Table II shows the water requirement as to pounds of dry matter produced, which is the ratio of the number of pounds of dry matter produced to the pounds of soil, rain, and irrigation water consumed.

It was found that the water requirement had been cut in two, or that the water efficiency had ben doubled by irrigation, rotation, and manure. Rotation is especially important on our rather heavy soils, and is likewise important in building up sandy land under irrigation.